


## luftgekühlt / air-cooled / refroidissement par air / refrigerado por gas


### TBi AUT 6G

Mix: 375 A, 60%  
CO<sub>2</sub>: 375 A, 60%  
ø 1,0 - 1,6 mm

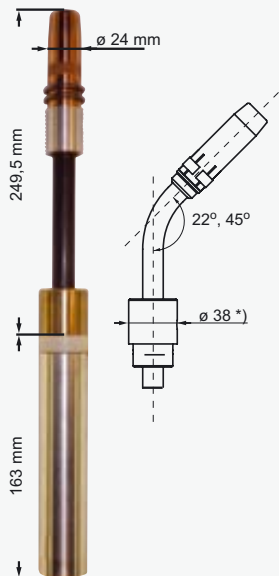


### TBi AUT 7G

Mix: 345 A, 60%  
CO<sub>2</sub>: 380 A, 60%  
ø 1,0 - 1,6 mm

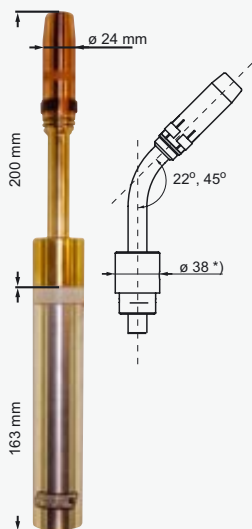

### TBi AUT 8G


Mix: 450 A, 60%  
CO<sub>2</sub>: 485 A, 60%  
ø 1,2 - 2,8 mm

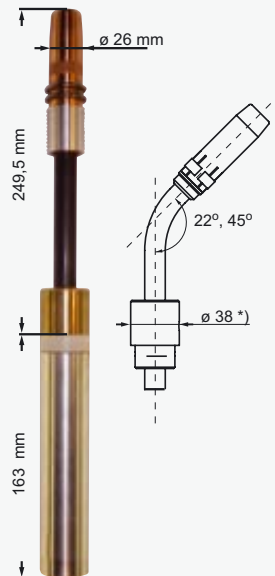

## wassergekühlt / water-cooled / refroidissement par eau / refrigerado por agua


### TBi AUT 5W

Mix: 300 A, 100%  
CO<sub>2</sub>: 350 A, 100%  
ø 0,8 - 1,2 mm

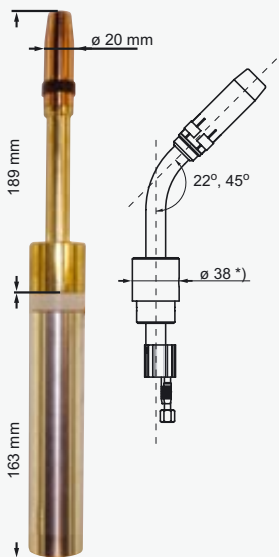


### TBi AUT 7W

Mix: 470 A, 100%  
CO<sub>2</sub>: 500 A, 100%  
ø 1,0 - 1,6 mm

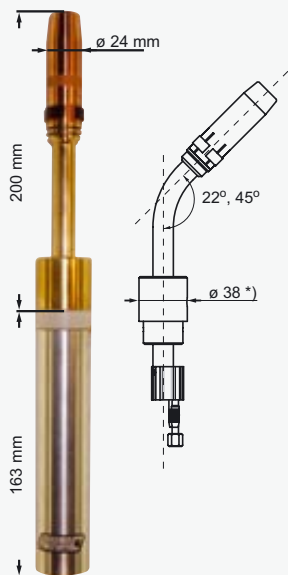


### TBi AUT 9W

Mix: 500 A, 100%  
CO<sub>2</sub>: 560 A, 100%  
ø 1,2 - 1,6 mm

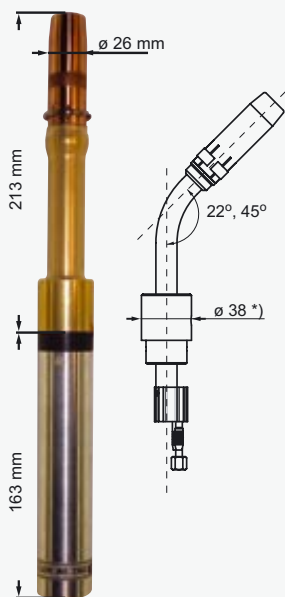

### TBi AUT 9W 3C

Mix: 600 A, 100%  
CO<sub>2</sub>: 650 A, 100%  
ø 1,2 - 1,6 mm

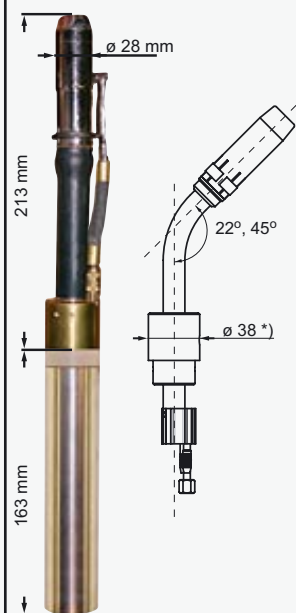

**Optionen:** ■ Griffrohr aus Aluminium

■ Sonderbrenner

\*) Ø 31 mm möglich

**Options:** ■ poignée d'aluminium

■ torches spéciales

\*) disponible avec Ø 31 mm

**Options:** ■ aluminum handle tube

■ custom-built torches

\*) Ø 31 mm possible

**Opciones:** ■ empuñadura de aluminio

■ antorchas especiales

\*) disponibles en Ø 31 mm