

Description and Application



This is a rutile flux cored wire which operates with a very stable, spatter free arc producing bright, smooth weld bead surfaces.

This wire is designed for welding duplex stainless steel such as AISI S31803 or EN 1.4462 stainless steels.

Due to the high nitrogen and high molybdenum levels in the weld metal, it is possible to obtain excellent resistance to chloride induced pitting corrosion.



Recommended Parameter Range, for flat position*

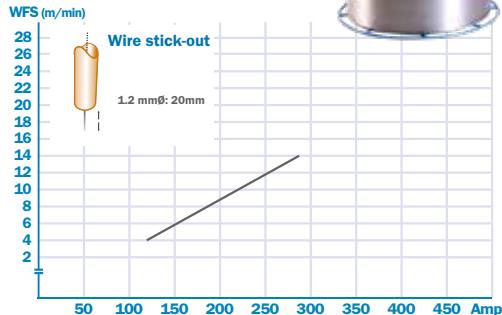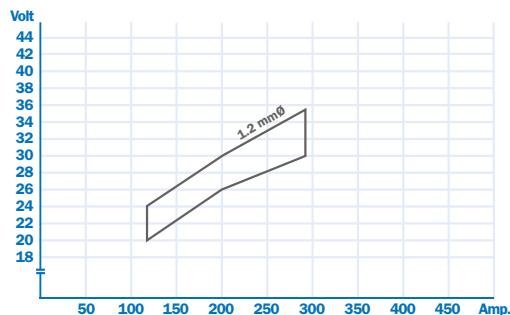

Typical Chemical Analysis (wt. %)*


C	Si	Mn	P	S	Ni	Cr	Mo	N	Nb	FNW
0.03	0.58	0.78	0.019	0.008	9.4	22.9	3.5	0.15	-	42.7

Typical Mechanical Properties*

	R _e (MPa)	R _m (MPa)	A _s (%)	CV(J)-20°C	CV(J)-46°C
Guarantee	670 min.450	850 min.690	29 min.20	45	40

* The above values and parameters are for all weld metal produced using Ar+CO₂ shielding gas

Welding Positions

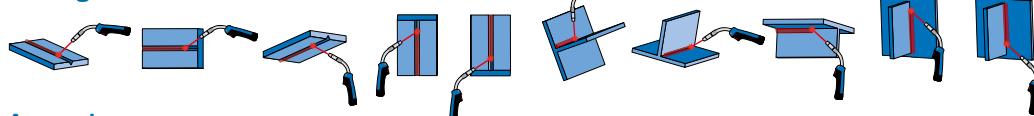

Approvals

LR	DNV GL	BV	ABS	R.M.R.S	Others
S31803	S31803	SA2205	-	AF-8dup	TÜV, RINA